

# EASY CLICK



*A flush valve with no need to  
dismantle  
the cistern*

The WIRQUIN EASY dual flush valve is one of the easiest flush valves to install. Thanks to its patented system, the EASY attaches directly over existing close coupled installations without removing the cistern. The dual flush technology 3/6L allows water saving, as the creator of this technology WIRQUIN's flush mechanisms are fully optimized and factory set. The cable operated button is can be installed immediately without adjustment.



SCAN  
to watch  
the video



**wirquin**

The only universal dual flush valve that can be installed without removing the cistern directly over existing close coupled installations.

## BENEFITS



### NO NEED TO REMOVE THE CISTERN TO CHANGE THE FLUSH VALVE

- Patented system: universal base



### PERFECT FIT SECURED INSTANTLY

- Butyl instant seal




### NO ADJUSTMENT OF THE HEIGHT NEEDED, QUICK ASSEMBLY AND SERVICING

- Cable operated button with easy clip system



### WATER SAVING

- 3/6L system

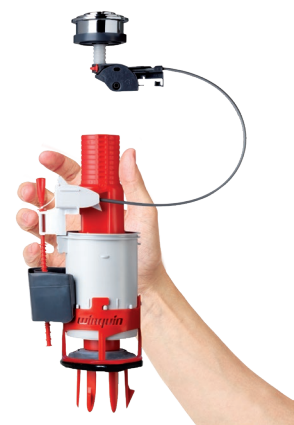

## Renovation flush valve

The EASY patented system can be installed directly over existing close coupled installations without removing the cistern.



## CHARACTERISTICS

Push button. Dual.

Positionning of button : Top.


Height of cistern min. : 320 mm. Height of cistern max. : 420 mm.

Lid hole diameter min : 14 mm. Lid hole diameter max : 58 mm.

Base diameter : 60 mm. Base diameter : 2 Inch.

Adjustment of the overflow : Fixe. Height of the overflow min. : 185 mm. Height of the overflow max. : 230 mm.

Main raw material : PP / PE / PS.

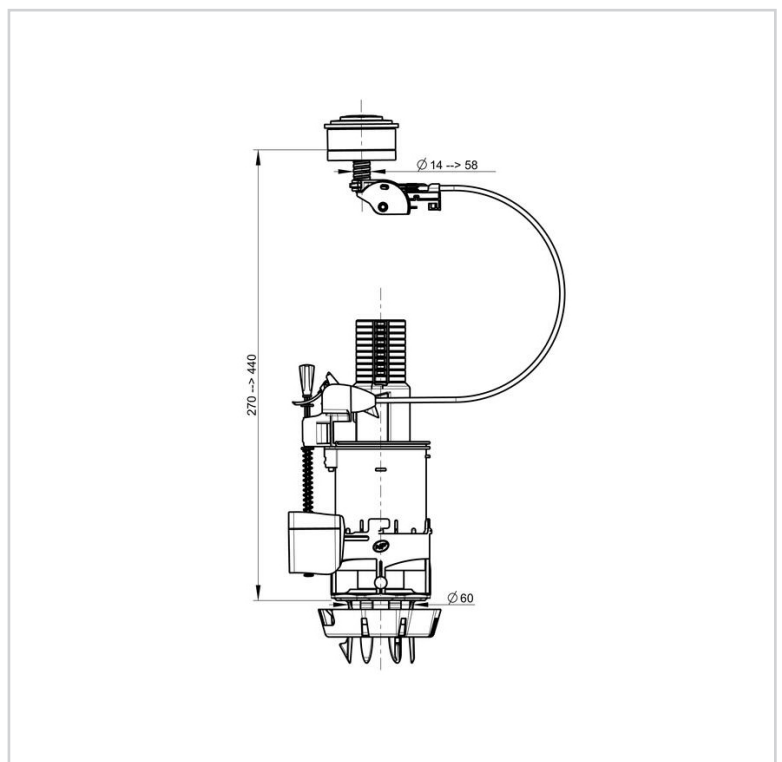

## CARE AND CLEANING

Wirquin flush valves are designed to last for years. Nevertheless there are some simple steps you can perform to maintain your Wirquin flush valve in top condition.

If the outside of the flush valve has calcium and mineral build-up; clean it by using vinegar and then rinse with fresh water.

If there's discoloration, it could indicate age and wear that could compromise the function of the valve. In this case replace the valve.

If there're leaks, replace the butyl seal or the washer between the cistern and the pan.

## QUALITY

NF and WRAS standard compliant.

The dual flush mechanism set to 3 liters for the small flush and 6 liters for the full flush, makes you save up to 40,000L per year (for a family of 4). As the creator of this technology, all WIRQUIN's flush mechanisms are fully optimized and factory set!

## TIPS

*A flush valve with no need to dismantle  
the cistern*



## KEY INFORMATION

Product name	Reference	EAN 13	Packaging	Product Qty / box
	10720605	3375537205295	MANUAL BLISTER	9